

Product Data Sheet

1. Flanged fittings

1.06 All flanged Y


All flanged Y PN10/16
Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04


Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

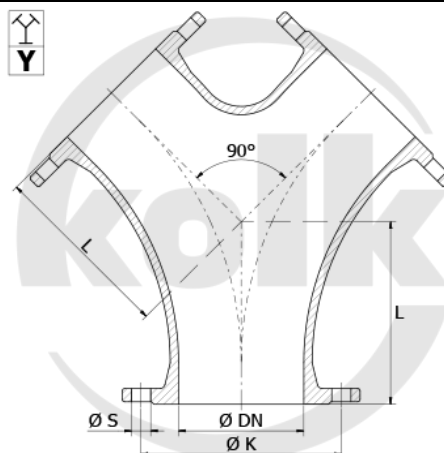

All flanged Y PN10/16

Article	Article Nr.	PN	Ø DN [mm]	L [mm]	Holes # [DN]	Ø K [mm]	Ø S [mm]	G [kg]						
Y 80/80	1.06Y1.000010	PN10/16	80	165	8	160	19	16						
Y 100/100	1.06Y1.010010	PN10/16	100	180	8	180	19	22						
Y 125/125	1.06Y1.010020	PN10/16	125	200	8	210	19	25						
Y 150/150	1.06Y1.010030	PN10/16	150	220	8	240	23	37						
Y 200/200	1.06Y2.020010	PN10	200	260	8	295	23	56						
Y 250/250	1.06Y2.020020	PN10	250	350	12	350	23	82						
Y 300/300	1.06Y2.030010	PN10	300	400	12	400	23	132						
Y 350/350	1.06Y2.030020	PN10	350	450	16	460	23	166						
Y 400/400	1.06Y2.040010	PN10	400	500	16	515	28	290						
Y 450/450	1.06Y2.040020	PN10	450	550	20	565	28	350						
Y 500/500	1.06Y2.050020	PN10	500	600	20	620	28	430						
Y 600/600	1.06Y2.060010	PN10	600	700	20	725	31	500						
Y 700/700	1.06Y2.070010	PN10	700	800	24	840	31	750						
Y 800/800	1.06Y2.080010	PN10	800	900	24	950	34	900						
Y 900/900	1.06Y2.090010	PN10	900	1000	28	1050	34	1200						
Y 1000/1000	1.06Y2.100010	PN10	1000	1100	28	1160	37	1500						
Y 1200/1200	1.06Y2.120010	PN10	1200	1300	32	1380	41	2350						
Y 200/200	1.06Y3.020010	PN16	200	260	12	295	23	56						
Y 250/250	1.06Y3.020020	PN16	250	350	12	355	28	82						
Y 300/300	1.06Y3.030010	PN16	300	400	12	410	28	132						
Y 350/350	1.06Y3.030020	PN16	350	450	16	470	28	166						

All flanged Y PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]						
Y 400/400	1.06Y3.040010	PN16	400	500	16	525	31	290						
Y 450/450	1.06Y3.040020	PN16	450	550	20	585	31	350						
Y 500/500	1.06Y3.050010	PN16	500	600	20	650	34	430						
Y 600/600	1.06Y3.060010	PN16	600	700	20	770	37	500						
Y 700/700	1.06Y3.070010	PN16	700	800	24	840	37	750						
Y 800/800	1.06Y3.080010	PN16	800	900	24	950	41	900						
Y 900/900	1.06Y3.090010	PN16	900	1000	28	1050	41	1200						
Y 1000/1000	1.06Y3.100010	PN16	1000	1100	28	1170	44	1500						
Y 1200/1200	1.06Y3.120010	PN16	1200	1300	32	1390	50	2350						