

Product Data Sheet

1. Flanged fittings

1.09 Studded adaptor flange

Studded adaptor flange (XO) PN10/16
Material EN 1563 EN-GJS-400-15

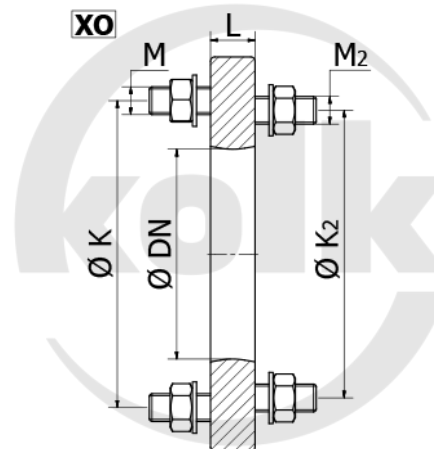
Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04

RAL GÜTEZEICHEN
VERBODEN VOORBEREIDEN
VON ANWANDERN UND FORTSETZEN
kiwa

Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50) or steel fabricated. Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662). Studded adaptor flanges type XO make adaptation from different flange drillings possible within very short length. When ordering specify counter flange and the material of the studded ends (A2/A4, hot dip or galvanized). If you need another thickness than specified, please indicate


Studded adaptor flange (XO) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	Type	M	M2	Holes # [DN]	ø K [mm]	Holes # [DN2]	ø K2 [mm]	G [kg]		
XO 80	1.09XO1.000010	PN10/16	80	20	PN10/16	M16	M16	4	160	8	160	4,6		
XO 200	1.09XO1.020010	PN10/16	200	30	PN10/16	M20	M20	8	295	12	295	13,4		
XO 250	1.09XO1.020020	PN10/16	250	30	PN10/16	M20	M24	12	350	12	355	18,8		
XO 300	1.09XO1.030010	PN10/16	300	30	PN10/16	M20	M24	12	400	12	410	25,2		
XO 350	1.09XO1.030020	PN10/16	350	40	PN10/16	M20	M24	16	460	16	470	35		
XO 400	1.09XO1.040010	PN10/16	400	40	PN10/16	M24	M27	16	515	16	525	44		
XO 450	1.09XO1.040020	PN10/16	450	40	PN10/16	M24	M27	20	565	20	585	64		
XO 500	1.09XO1.050010	PN10/16	500	40	PN10/16	M24	M30	20	620	20	650	74		
XO 600	1.09XO1.060010	PN10/16	600	50	PN10/16	M27	M33	20	725	20	770	104		
XO 700	1.09XO1.070010	PN10/16	700	50	PN10/16	M27	M33	24	840	24	840	114		
XO 800	1.09XO1.080010	PN10/16	800	60	PN10/16	M30	M36	24	950	24	950	152		
XO 900	1.09XO1.090010	PN10/16	900	60	PN10/16	M30	M36	28	1050	28	1050	182		
XO 1000	1.09XO1.100010	PN10/16	1000	70	PN10/16	M33	M39	28	1160	28	1170	154		
XO 1200	1.09XO1.120010	PN10/16	1200	70	PN10/16	M36	M45	32	1380	32	1390	396		