

Product Data Sheet

1. Flanged fittings

1.10 Adaptor flanged pipe

Adaptor flanged pipe (FFO) PN10/16

Material EN 1563 EN-GJS-400-15


Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04

RAL GÜTEZEICHEN
DEUTSCHE VERBANDSGEMEINSCHAFT
FÜR ABMESSUNGEN UND FORMEN
kiwa

Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50) or steel fabricated. Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662). Adaptor flanged pipe type FFO make adaptation from different flange drillings possible. The table contains only the standard lengths, non standard lengths are possible.

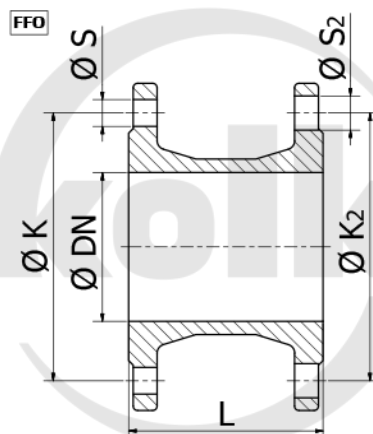

Adaptor flanged pipe (FFO) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	Type	Holes # [DN]	ø K [mm]	ø S [mm]	Holes # [DN]	ø K2 [mm]	ø S2 [mm]	G [kg]		
FFO 80	1.09FFO1.000010	PN10/16	80	200	PN10/16	4	160	19	8	160	19	9		
FFO 200	1.09FFO1.020010	PN10/16	200	200	PN10/16	8	295	23	12	295	23	23		
FFO 250	1.09FFO1.020020	PN10/16	250	200	PN10/16	12	350	23	12	355	28	32		
FFO 300	1.09FFO1.030010	PN10/16	300	200	PN10/16	12	400	23	12	410	28	40		
FFO 350	1.09FFO1.030020	PN10/16	350	200	PN10/16	16	460	23	16	470	28	48		
FFO 400	1.09FFO1.040010	PN10/16	400	200	PN10/16	16	515	28	16	525	31	56		
FFO 450	1.09FFO1.040020	PN10/16	450	200	PN10/16	20	565	28	20	585	31	88		
FFO 500	1.09FFO1.050010	PN10/16	500	200	PN10/16	20	620	28	20	650	34	104		
FFO 600	1.09FFO1.060010	PN10/16	600	200	PN10/16	20	725	31	20	770	37	150		
FFO 700	1.09FFO1.070010	PN10/16	700	200	PN10/16	24	840	31	24	840	37	160		
FFO 800	1.09FFO1.080010	PN10/16	800	200	PN10/16	24	950	34	24	950	41	210		
FFO 900	1.09FFO1.090010	PN10/16	900	300	PN10/16	28	1050	34	28	1050	41	240		
FFO 1000	1.09FFO1.100010	PN10/16	1000	300	PN10/16	28	1160	37	28	1170	44	330		
FFO 1200	1.09FFO1.120010	PN10/16	1200	300	PN10/16	32	1380	41	32	1390	50	510		