

Product Data Sheet

1. Flanged fittings

1.10 Bellmouth

Bellmouth (OMS) PN10/16


Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04


Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

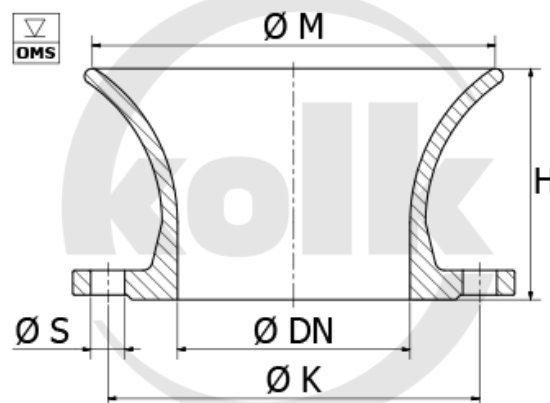

Bellmouth (OMS) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	H [mm]	Ø M [mm]	Holes # [DN]	Ø K [mm]	Ø S [mm]	G [kg]					
OMS 50	1.10OMS1.000010	PN10/16	50	100	135	4	125	19	5					
OMS 65	1.10OMS1.000020	PN10/16	65	100	135	4	145	19	5					
OMS 80	1.10OMS1.000030	PN10/16	80	120	170	8	160	19	5					
OMS 100	1.10OMS1.010010	PN10/16	100	130	190	8	180	19	6					
OMS 125	1.10OMS1.010020	PN10/16	125	145	210	8	210	19	8					
OMS 150	1.10OMS1.010030	PN10/16	150	150	260	8	240	23	10					
OMS 200	1.10OMS2.020010	PN10	200	180	300	8	295	23	15					
OMS 250	1.10OMS2.020020	PN10	250	200	350	12	350	23	22					
OMS 300	1.10OMS2.030010	PN10	300	250	420	12	400	23	30					
OMS 350	1.10OMS2.030020	PN10	350	250	550	16	460	23	40					
OMS 400	1.10OMS2.040010	PN10	400	250	550	16	515	28	50					
OMS 450	1.10OMS2.040020	PN10	450	280	650	20	565	28	65					
OMS 500	1.10OMS2.050010	PN10	500	300	680	20	620	28	84					
OMS 600	1.10OMS2.060010	PN10	600	300	780	20	725	31	122					
OMS 700	1.10OMS2.070010	PN10	700	300	895	24	840	31	160					
OMS 800	1.10OMS2.080010	PN10	800	320	1015	24	950	34	220					
OMS 900	1.10OMS2.090010	PN10	900	420	1165	28	1050	34	260					
OMS 1000	1.10OMS2.100010	PN10	1000	440	1290	28	1160	37	320					
OMS 1200	1.10OMS2.120010	PN10	1200	490	1515	32	1380	41	380					
OMS 200	1.10OMS3.020010	PN16	200	180	300	12	295	23	15					
OMS 250	1.10OMS3.020020	PN16	250	200	350	12	355	28	22					

Bellmouth (OMS) PN10/16

Article	Article Nr.	PN	ø DN [mm]	H [mm]	ø M [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
OMS 300	1.10OMS3.030010	PN16	300	250	420	12	410	28	30					
OMS 350	1.10OMS3.030020	PN16	350	250	550	16	470	28	40					
OMS 400	1.10OMS3.040010	PN16	400	250	550	16	525	31	50					
OMS 450	1.10OMS3.040020	PN16	450	280	650	20	585	31	65					
OMS 500	1.10OMS3.050010	PN16	500	300	680	20	650	34	84					
OMS 600	1.10OMS3.060010	PN16	600	300	780	20	770	37	122					
OMS 700	1.10OMS3.070010	PN16	700	300	895	24	840	37	160					
OMS 800	1.10OMS3.080010	PN16	800	320	1015	24	950	41	220					
OMS 900	1.10OMS3.090010	PN16	900	420	1165	28	1050	41	260					
OMS 1000	1.10OMS3.100010	PN16	1000	440	1290	28	1170	44	320					
OMS 1200	1.10OMS3.120010	PN16	1200	490	1515	32	1390	50	380					