

Product Data Sheet

1. Flanged fittings

1.11 Suction bend

Suction bend (ZQ) PN10/16


Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04


Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

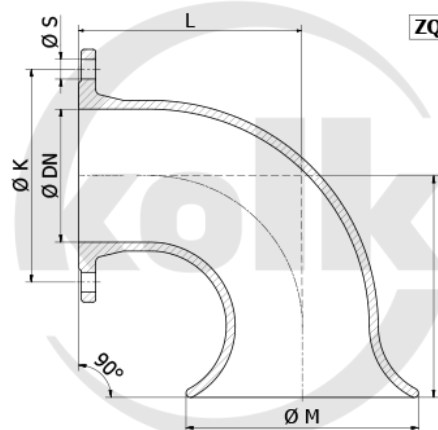

Suction bend (ZQ) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	L [mm]	Ø M [mm]	Holes # [DN]	Ø K [mm]	Ø S [mm]	G [kg]					
ZQ 100	1.11ZQ1.010010	PN10/16	100	200	150	8	180	19	18					
ZQ 125	1.11ZQ1.010020	PN10/16	125	225	190	8	210	19	23					
ZQ 150	1.11ZQ1.010030	PN10/16	150	250	225	8	240	23	45					
ZQ 200	1.11ZQ2.020010	PN10	200	300	300	8	295	23	50					
ZQ 250	1.11ZQ2.020020	PN10	250	350	375	12	350	23	65					
ZQ 300	1.11ZQ2.030010	PN10	300	400	450	12	400	23	110					
ZQ 350	1.11ZQ2.030020	PN10	350	450	525	16	460	23	130					
ZQ 400	1.11ZQ2.040010	PN10	400	500	600	16	515	28	180					
ZQ 450	1.11ZQ2.040020	PN10	450	550	680	20	565	28	195					
ZQ 500	1.11ZQ2.050010	PN10	500	600	750	20	620	28	270					
ZQ 600	1.11ZQ2.060010	PN10	600	700	900	20	725	31	440					
ZQ 700	1.11ZQ2.070010	PN10	700	800	1050	24	840	31	525					
ZQ 800	1.11ZQ2.080010	PN10	800	900	1200	24	950	34	640					
ZQ 900	1.11ZQ2.090010	PN10	900	1000	1350	28	1050	34	810					
ZQ 1000	1.11ZQ2.100010	PN10	1000	1100	1500	28	1160	37	980					
ZQ 1200	1.11ZQ2.120010	PN10	1200	1300	1800	32	1380	41	1350					
ZQ 200	1.11ZQ3.020010	PN16	200	300	300	12	295	23	50					
ZQ 250	1.11ZQ3.020020	PN16	250	350	375	12	355	28	65					
ZQ 300	1.11ZQ3.030010	PN16	300	400	450	12	410	28	110					
ZQ 350	1.11ZQ3.030020	PN16	350	450	525	16	470	28	130					
ZQ 400	1.11ZQ3.040010	PN16	400	500	600	16	525	31	180					

Suction bend (ZQ) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	ø M [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
ZQ 450	1.11ZQ3.040020	PN16	450	550	680	20	585	31	195					
ZQ 500	1.11ZQ3.050010	PN16	500	600	750	20	650	34	270					
ZQ 600	1.11ZQ3.060010	PN16	600	700	900	20	770	37	440					
ZQ 700	1.11ZQ3.070010	PN16	700	800	1050	24	840	37	525					
ZQ 800	1.11ZQ3.080010	PN16	800	900	1200	24	950	41	640					
ZQ 900	1.11ZQ3.090010	PN16	900	1000	1350	28	1050	41	810					
ZQ 1000	1.11ZQ3.100010	PN16	1000	1100	1500	28	1170	44	980					
ZQ 1200	1.11ZQ3.120010	PN16	1200	1300	1800	32	1390	50	1350					