

Product Data Sheet

1. Flanged fittings

1.13 Distance blocks

Distance block (VR)

Material EN 1563 EN-GJS-400-15


Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04



Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

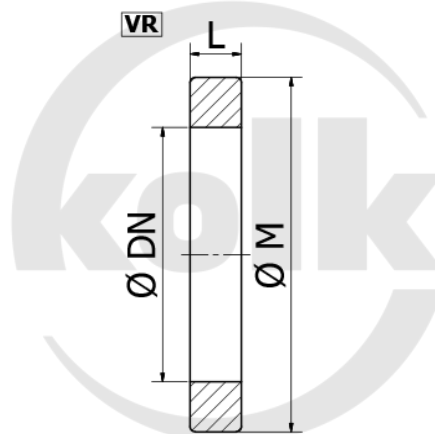

Distance block (VR)

Article	Article Nr.	PN	Ø DN [mm]	Ø M [mm]										
VR 50	1.14VR1.000010	PN10/16	50	104										
VR 65	1.14VR1.000020	PN10/16	65	125										
VR 80	1.14VR1.000030	PN10/16	80	140										
VR 100	1.14VR1.010010	PN10/16	100	160										
VR 125	1.14VR1.010020	PN10/16	125	190										
VR 150	1.14VR1.010030	PN10/16	150	216										
VR 200	1.14VR2.020010	PN10	200	270										
VR 250	1.14VR2.020020	PN10	250	325										
VR 300	1.14VR2.030010	PN10	300	375										
VR 350	1.14VR2.030020	PN10	350	435										
VR 400	1.14VR2.040010	PN10	400	486										
VR 450	1.14VR2.040020	PN10	450	536										
VR 500	1.14VR2.050010	PN10	500	592										
VR 600	1.14VR2.060010	PN10	600	692										
VR 700	1.14VR2.070010	PN10	700	808										
VR 800	1.14VR2.080010	PN10	800	914										
VR 900	1.14VR2.090010	PN10	900	1014										
VR 1000	1.14VR2.041010	PN10	1000	1120										
VR 1200	1.14VR2.120010	PN10	1200	1336										
VR 200	1.14VR3.020010	PN16	200	272										
VR 250	1.14VR3.020020	PN16	250	326										

Distance block (VR)

Article	Article Nr.	PN	ø DN [mm]	ø M [mm]										
VR 300	1.14VR3.030010	PN16	300	380										
VR 350	1.14VR3.030020	PN16	350	442										
VR 400	1.14VR3.040010	PN16	400	494										
VR 450	1.14VR3.040020	PN16	450	554										
VR 500	1.14VR3.050010	PN16	500	616										
VR 600	1.14VR3.060010	PN16	600	732										
VR 700	1.14VR3.070010	PN16	700	802										
VR 800	1.14VR3.080010	PN16	800	908										
VR 900	1.14VR3.090010	PN16	900	1008										
VR 1000	1.14VR3.041010	PN16	1000	1126										
VR 1200	1.14VR3.120010	PN16	1200	1340										