

Product Data Sheet

2. Tyton fittings

2.02 Flange spigot

Flange-spigot (F) PN10/16


Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04


Kolk Tyton fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

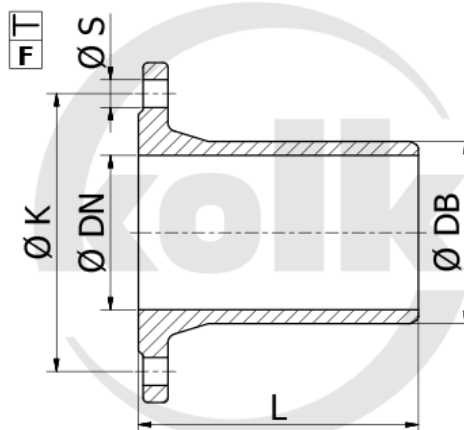

Flange-spigot (F) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
F 50	2.02F1.000010	PN10/16	50	66	350	4	125	19	5					
F 65	2.02F1.000020	PN10/16	65	86	350	4	145	19	6					
F 80	2.02F1.000030	PN10/16	80	98	350	8	160	19	8					
F 100	2.02F1.010010	PN10/16	100	118	360	8	180	19	9					
F 125	2.02F1.010020	PN10/16	125	144	370	8	210	19	12					
F 150	2.02F1.010030	PN10/16	150	170	380	8	240	23	16					
F 200	2.02F2.020010	PN10	200	222	400	8	295	23	24					
F 250	2.02F2.020020	PN10	250	274	420	12	350	23	32					
F 300	2.02F2.030010	PN10	300	326	440	12	400	23	43					
F 350	2.02F2.030020	PN10	350	378	460	16	460	23	53					
F 400	2.02F2.040010	PN10	400	429	480	16	515	28	65					
F 450	2.02F2.040020	PN10	450	477	500	20	565	28	85					
F 500	2.02F2.050010	PN10	500	532	520	20	620	28	94					
F 600	2.02F2.060010	PN10	600	635	560	20	725	31	135					
F 700	2.02F2.070010	PN10	700	738	600	24	840	31	180					
F 800	2.02F2.080010	PN10	800	842	600	24	950	34	230					
F 900	2.02F2.090010	PN10	900	945	600	28	1050	34	270					
F 1000	2.02F2.100010	PN10	1000	1048	600	28	1160	37	328					
F 1200	2.02F2.120010	PN10	1200	1255	600	32	1380	41	460					
F 200	2.02F3.020010	PN16	200	222	400	12	295	23	24					
F 250	2.02F3.020020	PN16	250	274	420	12	355	28	32					

Flange-spigot (F) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
F 300	2.02F3.030010	PN16	300	326	440	12	410	28	43					
F 350	2.02F3.030020	PN16	350	378	460	16	470	28	55					
F 400	2.02F3.040010	PN16	400	429	480	16	525	31	70					
F 450	2.02F3.040020	PN16	450	477	500	20	585	31	90					
F 500	2.02F3.050010	PN16	500	532	520	20	650	34	110					
F 600	2.02F3.060010	PN16	600	635	560	20	770	37	160					
F 700	2.02F3.070010	PN16	700	738	600	24	840	37	195					
F 800	2.02F3.080010	PN16	800	842	600	24	950	41	245					
F 900	2.02F3.090010	PN16	900	945	600	28	1050	41	300					
F 1000	2.02F3.100010	PN16	1000	1048	600	28	1170	44	370					
F 1200	2.02F3.120010	PN16	1200	1255	600	32	1390	50	520					