

Product Data Sheet

2. Tyton fittings

2.03 Double socket bend

Double socket bend 30° (MMK 30°) PN10/16

Material EN 1563 EN-GJS-500-7

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662


Approval Kiwa BRL-K772



RAL GÜTEZEICHEN



Kolk Tyton fittings are made of ductile iron EN 1563:2011 EN-GJS-500-7. Design acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

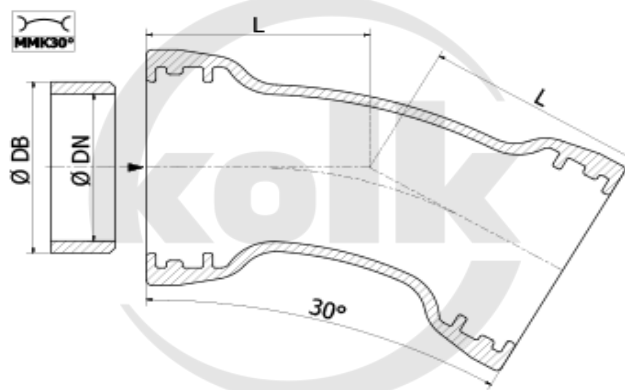

Double socket bend 30° (MMK 30°) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	Ø DB [mm]	L [mm]	G [kg]								
MMK 80-30°	2.04MMK1.000015	PN10/16	80	98	45	7								
MMK 100-30°	2.04MMK1.010015	PN10/16	100	118	50	10								
MMK 125-30°	2.04MMK1.010025	PN10/16	125	144	55	17								
MMK 150-30°	2.04MMK1.010035	PN10/16	150	170	65	15								
MMK 200-30°	2.04MMK1.020015	PN10/16	200	222	80	23								
MMK 250-30°	2.04MMK1.020025	PN10/16	250	274	95	28								
MMK 300-30°	2.04MMK1.030015	PN10/16	300	326	110	42								
MMK 350-30°	2.04MMK1.030025	PN10/16	350	378	125	50								
MMK 400-30°	2.04MMK1.040015	PN10/16	400	429	140	65								
MMK 450-30°	2.04MMK1.040025	PN10/16	450	477	160	85								
MMK 500-30°	2.04MMK1.050015	PN10/16	500	532	180	110								
MMK 600-30°	2.04MMK1.060015	PN10/16	600	635	200	160								
MMK 700-30°	2.04MMK1.070015	PN10/16	700	738	230	254								
MMK 800-30°	2.04MMK1.080015	PN10/16	800	842	260	346								
MMK 900-30°	2.04MMK1.090015	PN10/16	900	948	290	490								
MMK 1000-30°	2.04MMK1.100015	PN10/16	1000	1048	320	620								
MMK 1200-30°	2.04MMK1.120015	PN10/16	1200	1255	380	960								