

Product Data Sheet

Fittings for PE/PVC

3.01 Flange socket

Flange-socket (E-KS) PN10/16

Material EN 1563 EN-GJS-400-15

Design Std. EN 12842


Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


RAL GÜTEZEICHEN

kiwa

Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

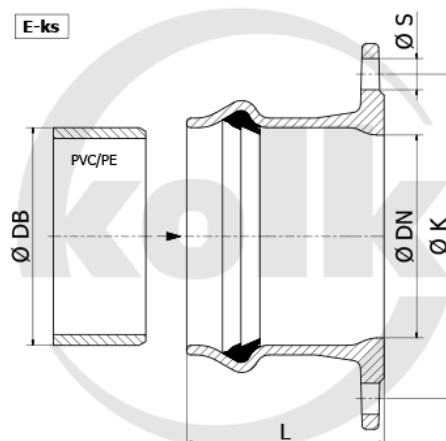

Flange-socket (E-KS) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
E-KS 50/50	3.01EKS1.000010	PN10/16	50	50	100	4	125	19	3					
E-KS 50/63	3.01EKS1.000020	PN10/16	50	63	100	4	125	19	3					
E-KS 80/63	3.01EKS1.000030	PN10/16	80	63	120	8	160	19	4					
E-KS 80/75	3.01EKS1.000040	PN10/16	80	75	120	8	160	19	4					
E-KS 80/90	3.01EKS1.000050	PN10/16	80	90	120	8	160	19	4					
E-KS 100/110	3.01EKS1.010010	PN10/16	100	110	130	8	180	19	6					
E-KS 125/125	3.01EKS1.010020	PN10/16	125	125	145	8	210	19	7					
E-KS 125/140	3.01EKS1.010030	PN10/16	125	140	145	8	210	19	8					
E-KS 150/160	3.01EKS1.010040	PN10/16	150	160	150	8	240	23	10					
E-KS 200/200	3.01EKS2.020010	PN10	200	200	190	8	295	23	16					
E-KS 200/225	3.01EKS2.020020	PN10	200	225	190	8	295	23	16					
E-KS 250/250	3.01EKS2.020030	PN10	250	250	220	12	350	23	30					
E-KS 250/280	3.01EKS2.020040	PN10	250	280	220	12	350	23	30					
E-KS 300/315	3.01EKS2.030010	PN10	300	315	250	12	400	23	35					
E-KS 350/355	3.01EKS2.030020	PN10	350	355	265	16	460	23	48					
E-KS 400/400	3.01EKS2.040010	PN10	400	400	295	16	515	28	70					
E-KS 450/450	3.01EKS2.040020	PN10	450	450	310	20	565	28	75					
E-KS 500/500	3.01EKS2.050010	PN10	500	500	340	20	620	28	96					
E-KS 600/630	3.01EKS2.060010	PN10	600	630	420	20	725	31	130					
E-KS 200/200	3.01EKS3.020010	PN16	200	200	190	12	295	23	16					
E-KS 200/225	3.01EKS3.020020	PN16	200	225	190	12	295	23	16					

Flange-socket (E-KS) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
E-KS 250/250	3.01EKS3.020030	PN16	250	250	220	12	355	28	30					
E-KS 250/280	3.01EKS3.020040	PN16	250	280	220	12	355	28	30					
E-KS 300/315	3.01EKS3.030010	PN16	300	315	250	12	410	28	35					
E-KS 350/355	3.01EKS3.030020	PN16	350	355	265	16	470	28	48					
E-KS 400/400	3.01EKS3.040010	PN16	400	400	295	16	525	31	70					
E-KS 450/450	3.01EKS3.040020	PN16	450	450	310	20	585	31	75					
E-KS 500/500	3.01EKS3.050010	PN16	500	500	340	20	650	34	96					
E-KS 600/630	3.01EKS3.060010	PN16	600	630	420	20	770	37	130					