

Product Data Sheet

Fittings for PE/PVC

3.01 Flange socket

Flange-socket Wavin (E-tv-W) PN10


Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

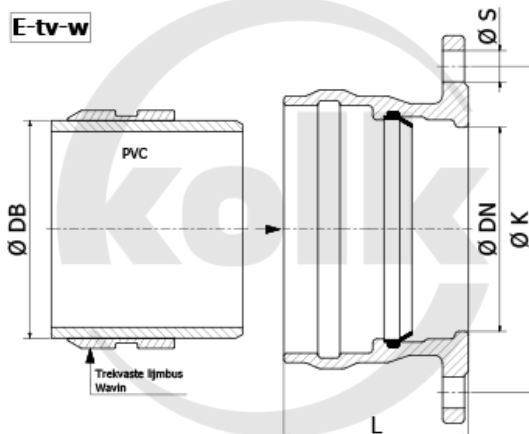

Flange-socket Wavin (E-tv-W) PN10

Article	Article Nr.	PN	Ø DN [mm]	Ø DB [mm]	L [mm]	Holes # [DN]	Ø K [mm]	Ø S [mm]	G [kg]					
E-tv-W 100/110	3.01ETW2.010010	PN10	100	110	120	8	180	19	6					
E-tv-W 125/125	3.01ETW2.010020	PN10	125	125	135	8	210	19	8					
E-tv-W 150/160	3.01ETW2.010030	PN10	150	160	135	8	240	23	10					
E-tv-W 200/200	3.01ETW2.020010	PN10	200	200	150	8	295	23	14					
E-tv-W 250/250	3.01ETW2.020020	PN10	250	250	175	12	350	23	22					
E-tv-W 300/315	3.01ETW2.030010	PN10	300	315	200	12	400	23	28					
E-tv-W 350/355	3.01ETW2.030020	PN10	350	355	210	16	460	23	38					
E-tv-W 400/400	3.01ETW2.040010	PN10	400	400	235	16	515	28	42					
E-tv-W 450/450	3.01ETW2.040020	PN10	450	450	235	20	565	28	55					
E-tv-W 500/500	3.01ETW2.050010	PN10	500	500	275	20	620	28	72					
E-tv-W 600/630	3.01ETW2.060010	PN10	600	630	320	20	725	31	90					