

Product Data Sheet

Fittings for PE/PVC

3.02 Flange on double socket Tee

Double socket T with flanged branch (MMA-KS-tv)

PN10

Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662


Approval Kiwa BRL-K773/02



RAL GÜTEZEICHEN
DEUTSCHE VEREINIGUNG
VON ANWANDER UND VERBÄNDER

kiwa

Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

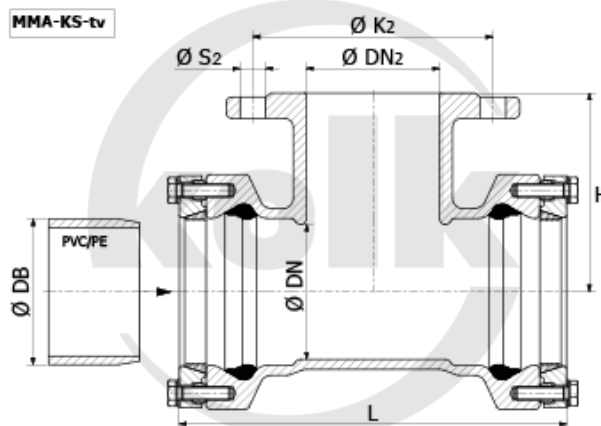

Double socket T with flanged branch (MMA-KS-tv) PN10

Article	Article Nr.	PN	Ø DN [mm]	Ø DB [mm]	Ø DN2 [mm]	L [mm]	H [mm]	Holes # [DN2]	Ø K2 [mm]	Ø S2 [mm]	G [kg]			
MMA-KS-tv 63/50	3.02AKt1.000010	PN10/16	50	50	63	235	100	4	125	19	8,3			
MMA-KS-tv 75/65	3.02AKt1.000020	PN10/16	65	65	75	250	110	4	145	19	9,2			
MMA-KS-tv 90/80	3.02AKt1.000030	PN10/16	80	80	90	270	140	8	160	19	11,2			
MMA-KS-tv 110/50	3.02AKt1.010010	PN10/16	100	50	110	240	150	4	125	19	10			
MMA-KS-tv 110/80	3.02AKt1.010020	PN10/16	100	80	110	240	150	8	160	19	11,7			
MMA-KS-tv 110/100	3.02AKt1.010030	PN10/16	100	100	110	290	150	8	180	19	12,2			
MMA-KS-tv 125/80	3.02AKt1.010040	PN10/16	125	80	125	275	160	8	160	19	14,3			
MMA-KS-tv 125/100	3.02AKt1.010050	PN10/16	125	100	125	295	160	8	180	19	14,5			
MMA-KS-tv 125/125	3.02AKt1.010060	PN10/16	125	125	125	340	160	8	210	19	15,1			
MMA-KS-tv 140/80	3.02AKt1.010070	PN10/16	125	80	140	290	170	8	160	19	15			
MMA-KS-tv 140/100	3.02AKt1.010080	PN10/16	125	100	140	310	170	8	180	19	15,4			
MMA-KS-tv 140/125	3.02AKt1.010090	PN10/16	125	125	140	335	170	8	210	19	16,3			
MMA-KS-tv 160/80	3.02AKt1.010100	PN10/16	150	80	160	300	180	8	160	19	16,7			
MMA-KS-tv 160/100	3.02AKt1.010110	PN10/16	150	100	160	320	180	8	180	19	17,3			
MMA-KS-tv 160/125	3.02AKt1.010120	PN10/16	150	125	160	360	180	8	210	19	17,6			
MMA-KS-tv 160/150	3.02AKt1.010130	PN10/16	150	150	160	380	180	8	240	23	20,2			
MMA-KS-tv 180/80	3.02AKt1.010140	PN10/16	150	80	180	330	200	8	160	19	23,5			
MMA-KS-tv 180/100	3.02AKt1.010150	PN10/16	150	100	180	355	200	8	180	19	25,6			
MMA-KS-tv 180/125	3.02AKt1.010160	PN10/16	150	125	180	380	200	8	210	19	28,6			
MMA-KS-tv 180/150	3.02AKt1.010170	PN10/16	150	150	180	415	200	8	240	23	31,5			
MMA-KS-tv 200/80	3.02AKt1.020010	PN10/16	200	80	200	400	220	8	160	19	39			
MMA-KS-tv 200/100	3.02AKt1.020020	PN10/16	200	100	200	420	220	8	180	19	40			

Double socket T with flanged branch (MMA-KS-tv) PN10

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	ø DN2 [mm]	L [mm]	H [mm]	Holes # [DN2]	ø K2 [mm]	ø S2 [mm]	G [kg]			
MMA-KS-tv 200/125	3.02AKt1.020030	PN10/16	200	125	200	440	220	8	210	19	41			
MMA-KS-tv 200/150	3.02AKt1.020040	PN10/16	200	150	200	450	220	8	240	23	46			
MMA-KS-tv 200/200	3.02AKt2.020010	PN10	200	200	200	480	220	8	295	23	47			
MMA-KS-tv 225/80	3.02AKt1.020050	PN10/16	200	80	225	400	230	8	160	19	41			
MMA-KS-tv 225/100	3.02AKt1.020060	PN10/16	200	100	225	420	230	8	180	19	43			
MMA-KS-tv 225/125	3.02AKt1.020070	PN10/16	200	125	225	440	230	8	210	19	45			
MMA-KS-tv 225/150	3.02AKt1.020080	PN10/16	200	150	225	460	230	8	240	23	49			
MMA-KS-tv 225/200	3.02AKt2.020020	PN10	200	200	225	480	230	8	295	23	51			
MMA-KS-tv 200/200	3.02AKt3.020010	PN16	200	200	200	480	220	12	295	23	48			
MMA-KS-tv 225/200	3.02AKt3.020020	PN16	200	200	225	480	230	12	295	23	51			