

Product Data Sheet

Fittings for PE/PVC

3.02 Flange on double socket Tee

All socket T (MMB-KS-tv) PN10

PN10

Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662


Approval Kiwa BRL-K773/02



RAL GÜTEZEICHEN
DIN EN ISO 9001
Zertifiziert

kiwa

Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

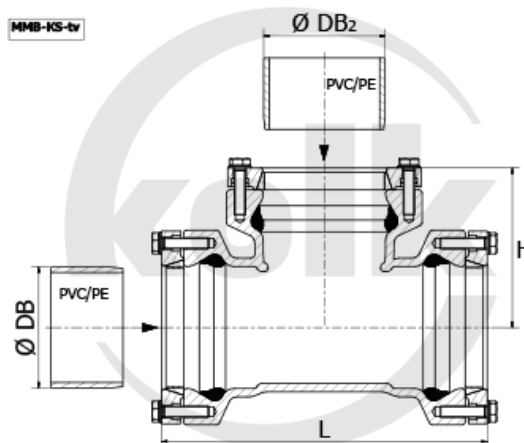

All socket T (MMB-KS-tv) PN10

Article	Article Nr.	PN	ø DN [mm]	ø DB2 [mm]	L [mm]	H [mm]	G [kg]								
MMB-KS-tv 63/63	3.02BKt1.000010	PN10/16	63	63	236	120	5,9								
MMB-KS-tv 75/75	3.02BKt1.000020	PN10/16	75	75	252	125	7,7								
MMB-KS-tv 90/63	3.02BKt1.000030	PN10/16	90	63	243	135	7,5								
MMB-KS-tv 90/90	3.02BKt1.000040	PN10/16	90	90	273	135	8,9								
MMB-KS-tv 110/63	3.02BKt1.010010	PN10/16	110	63	245	140	7,8								
MMB-KS-tv 110/90	3.02BKt1.010020	PN10/16	110	90	275	145	8,7								
MMB-KS-tv 110/110	3.02BKt1.010030	PN10/16	110	110	295	145	9								
MMB-KS-tv 125/90	3.02BKt1.010040	PN10/16	125	90	280	150	10,1								
MMB-KS-tv 125/110	3.02BKt1.010050	PN10/16	125	110	298	150	10,4								
MMB-KS-tv 125/125	3.02BKt1.010060	PN10/16	125	125	308	155	14,7								
MMB-KS-tv 140/90	3.02BKt1.010070	PN10/16	140	90	295	160	12,1								
MMB-KS-tv 140/110	3.02BKt1.010080	PN10/16	140	110	310	160	12,3								
MMB-KS-tv 140/140	3.02BKt1.010090	PN10/16	140	140	315	165	18,5								
MMB-KS-tv 160/90	3.02BKt1.010100	PN10/16	160	90	320	170	13,8								
MMB-KS-tv 160/110	3.02BKt1.010110	PN10/16	160	110	340	170	14,1								
MMB-KS-tv 160/160	3.02BKt1.010120	PN10/16	160	160	390	190	16,4								
MMB-KS-tv 180/125	3.02BKt1.010130	PN10/16	180	125	370	180	23								
MMB-KS-tv 180/180	3.02BKt1.010140	PN10/16	180	180	430	210	28								
MMB-KS-tv 200/200	3.02BKt1.020010	PN10/16	200	200	480	230	34								
MMB-KS-tv 225/90	3.02BKt1.020020	PN10/16	225	90	375	200	30								
MMB-KS-tv 225/110	3.02BKt1.020030	PN10/16	225	110	385	200	30								
MMB-KS-tv 225/160	3.02BKt1.020040	PN10/16	225	160	410	230	43								

All socket T (MMB-KS-tv) PN10

Article	Article Nr.	PN	ø DN [mm]	ø DB2 [mm]	L [mm]	H [mm]	G [kg]							
MMB-KS-tv 225/225	3.02BKt1.020050	PN10/16	225	225	500	245	56							