

Product Data Sheet

Fittings for PE/PVC

3.03 Duckfoot bend

Duckfootbend tensile (EN-KS-tv) PN10/16


Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

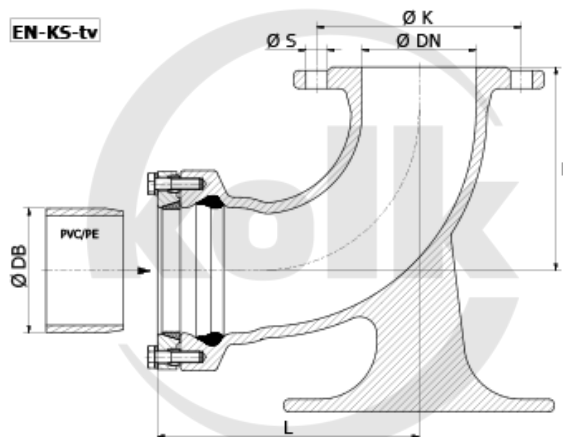

Duckfootbend tensile (EN-KS-tv) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	H [mm]	# Gaten [DN]	ø K [mm]	ø S [mm]	G [kg]				
EN-KS-tv 63/80	3.03NKt1.000010	PN10/16	80	63	225	170	8	160	19	11				
EN-KS-tv 75/80	3.03NKt1.000020	PN10/16	80	75	225	170	8	160	19	12				
EN-KS-tv 90/80	3.03NKt1.000030	PN10/16	80	90	225	170	8	160	19	13				
EN-KS-tv 110/80	3.03NKt1.010010	PN10/16	80	110	235	170	8	160	19	13				
EN-KS-tv 110/100	3.03NKt1.010015	PN10/16	100	110	245	180	8	180	19	16				
EN-KS-tv 160/80	3.03NKt1.010020	PN10/16	80	160	245	180	8	160	19	16				