

Product Data Sheet

Fittings for PE/PVC

3.03 Duckfoot bend

Duckfootbend tensile Wavin (PENR-tv-W)

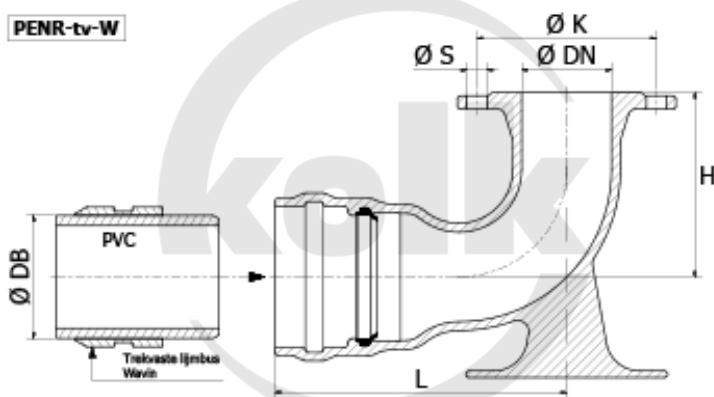
PN10
Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).


PENR-tv-W


Duckfootbend tensile Wavin (PENR-tv-W) PN10

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	H [mm]	# Gaten [DN]	ø K [mm]	ø S [mm]	G [kg]				
PENR-tv-W 110/80	PN10	80	PN10	110	235	170	4	160	19	15				
PENR-tv-W 110/80	PN10	80	PN10	110	235	170	8	160	19	15				
PENR-tv-W 160/80	PN10	80	PN10	160	245	180	4	160	19	19				
PENR-tv-W 160/80	PN10	80	PN10	160	245	180	8	160	19	19				