

Product Data Sheet

Fittings for PE/PVC

3.04 Double socket bend


Double socket bend 90° tensile (MMQ-KS-tv)
PN10/16
Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

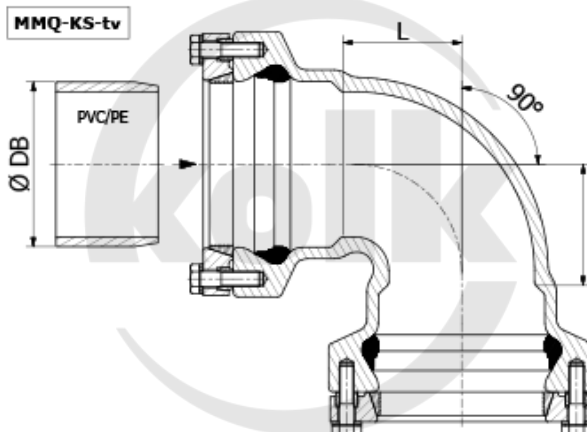

Double socket bend 90° tensile (MMQ-KS-tv) PN10/16

Article	Article Nr.	PN	Ø DB [mm]	L [mm]	G [kg]									
MMQ-KS-tv 63	3.04QKt1.000010	PN10/16	63	124	4									
MMQ-KS-tv 75	3.04QKt1.000020	PN10/16	75	138	6									
MMQ-KS-tv 90	3.04QKt1.000030	PN10/16	90	152	7									
MMQ-KS-tv 110	3.04QKt1.010010	PN10/16	110	172	9									
MMQ-KS-tv 160	3.04QKt1.010020	PN10/16	160	236	20									