

Product Data Sheet

Fittings for PE/PVC

3.05 End cap

End Cap (EXI-KS) PN10/16

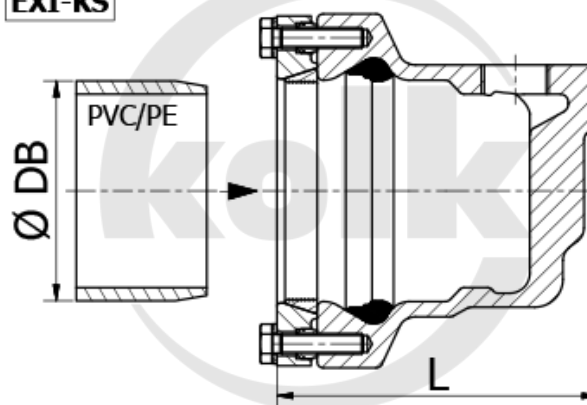
Material EN 1563 EN-GJS-400-15

Design Std. EN 12842

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K773/02


Kolk fittings for PE/PVC are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 12842, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).


EXI-KS


End Cap (EXI-KS) PN10/16

Article	Article Nr.	PN	Ø DB [mm]	L [mm]	Thread	G [kg]								
EXI-KS 75	3.05EXK2.000010	PN10	75	140	1"	3								
EXI-KS 90	3.05EXK2.000020	PN10	90	140	1"	4								
EXI-KS 110	3.05EXK2.010010	PN10	110	160	1"	6								
EXI-KS 125	3.05EXK2.010020	PN10	125	160	1 ¼"	7								
EXI-KS 140	3.05EXK2.010030	PN10	140	170	1 ½"	8								
EXI-KS 160	3.05EXK2.010040	PN10	160	180	2"	12								
EXI-KS 180	3.05EXK2.010050	PN10	180	190	2"	12								
EXI-KS 200	3.05EXK2.020010	PN10	200	205	2"	14								