

Product Data Sheet

4. Couplings

4.01 Dismantling joints

Dismantling joints not lockable (RN) PN10/16

Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662



Approval Kiwa



RAI GÜTEZEICHEN
SIEHE ÜBERPRÜFUNG
VON ABNÄHME UND SCHWELLEN

kiwa

Kolk dismantling joints are made of steel, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662). When ordering specify material quality for tie rods (A2/A4, hot dip or galvanized).

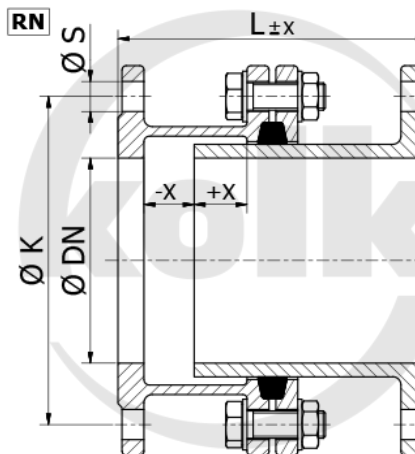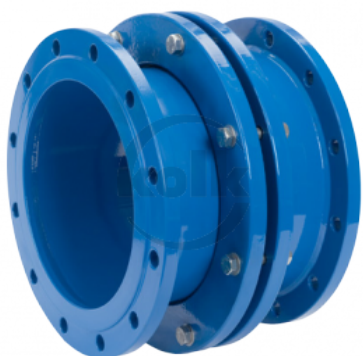

Dismantling joints not lockable (RN) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	X [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]						
RN 50	4.01RN1.000010	PN10/16	50	300	40	4	125	19	12						
RN 65	4.01RN1.000020	PN10/16	65	300	40	4	145	19	14						
RN 80	4.01RN1.000030	PN10/16	80	300	40	8	160	19	16						
RN 100	4.01RN1.010010	PN10/16	100	300	40	8	180	19	20						
RN 125	4.01RN1.010020	PN10/16	125	300	40	8	210	19	26						
RN 150	4.01RN1.010030	PN10/16	150	300	40	8	240	23	32						
RN 200	4.01RN2.020010	PN10	200	300	40	8	295	23	46						
RN 250	4.01RN2.020020	PN10	250	350	50	12	350	23	69						
RN 300	4.01RN2.030010	PN10	300	350	50	12	400	23	69						
RN 350	4.01RN2.030020	PN10	350	350	50	16	460	23	98						
RN 400	4.01RN2.040010	PN10	400	380	50	16	515	28	122						
RN 450	4.01RN2.040020	PN10	450	380	50	20	565	28	128						
RN 500	4.01RN2.050010	PN10	500	380	50	20	620	28	145						
RN 600	4.01RN2.060010	PN10	600	380	50	20	725	31	195						
RN 700	4.01RN2.070010	PN10	700	380	50	24	840	31	245						
RN 800	4.01RN2.080010	PN10	800	380	50	24	950	34	304						
RN 900	4.01RN2.090010	PN10	900	380	50	28	1050	34	348						
RN 1000	4.01RN2.100010	PN10	1000	380	50	28	1160	37	400						
RN 1100	4.01RN2.110010	PN10	1100	380	50	32	1270	37	480						
RN 1200	4.01RN2.120010	PN10	1200	400	50	32	1380	41	615						
RN 1400	4.01RN2.140010	PN10	1400	400	50	36	1590	44	820						
RN 1500	4.01RN2.150010	PN10	1500	400	50	36	1700	44	920						
RN 1600	4.01RN2.160010	PN10	1600	400	50	40	1820	50	1050						

Dismantling joints not lockable (RN) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	X [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]						
RN 1800	4.01RN2.180010	PN10	1800	440	50	44	2020	50	1240						
RN 2000	4.01RN2.200010	PN10	2000	440	50	48	2230	50	1500						
RN 200	4.01RN3.020010	PN16	200	300	40	12	295	23	46						
RN 250	4.01RN3.020020	PN16	250	350	50	12	355	28	69						
RN 300	4.01RN3.030010	PN16	300	350	50	12	410	28	69						
RN 350	4.01RN3.030020	PN16	350	350	50	16	470	28	98						
RN 400	4.01RN3.040010	PN16	400	380	50	16	525	31	122						
RN 450	4.01RN3.040020	PN16	450	380	50	20	585	31	128						
RN 500	4.01RN3.050010	PN16	500	380	50	20	650	34	145						
RN 600	4.01RN3.060010	PN16	600	380	50	20	770	37	195						
RN 700	4.01RN3.070010	PN16	700	380	50	24	840	37	245						
RN 800	4.01RN3.080010	PN16	800	380	50	24	950	41	304						
RN 900	4.01RN3.090010	PN16	900	390	50	28	1050	41	348						
RN 1000	4.01RN3.100010	PN16	1000	390	50	28	1170	44	400						
RN 1100	4.01RN3.110010	PN16	1100	400	50	32	1270	44	480						
RN 1200	4.01RN3.120010	PN16	1200	400	50	32	1390	50	615						
RN 1400	4.01RN3.140010	PN16	1400	400	50	36	1590	50	820						
RN 1500	4.01RN3.150010	PN16	1500	400	50	36	1710	57	920						
RN 1600	4.01RN3.160010	PN16	1600	400	50	40	1820	57	1050						
RN 1800	4.01RN3.180010	PN16	1800	440	50	44	2020	57	1240						
RN 2000	4.01RN3.200010	PN16	2000	440	50	48	2230	62	1500						