

Product Data Sheet

5. Gate valves

5.02 Socket gate valves

Socket gate valves (SMM) PN10/16

Material EN 1563 EN-GJS-400-15


Design Std. EN 1074-2

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K602/04

RAL GÜTEZEICHEN
kiwa

Kolk gate valves are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 1074-2 (DIN 3352-4) and EN 1171, socket connection for PE/PVC pipe. Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

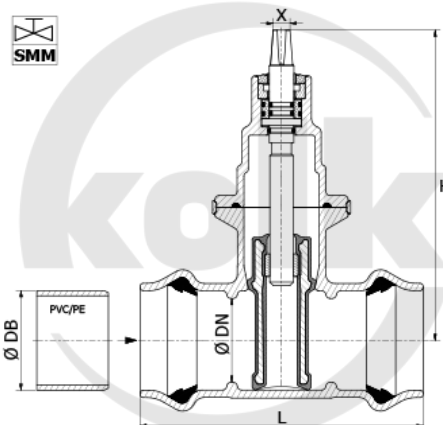

Socket gate valves (SMM) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	Ø DB [mm]	L [mm]	X [mm]	H [mm]	G [kg]							
SMM 65	5.02SMM1.000010	PN10/16	65	75	255	17	210	10							
SMM 80	5.02SMM1.000020	PN10/16	80	90	260	17	237	14							
SMM 100	5.02SMM1.010010	PN10/16	100	110	280	19	280	18							
SMM 125	5.02SMM1.010020	PN10/16	125	125	320	19	332	22							
SMM 150	5.02SMM1.010030	PN10/16	150	160	355	19	371	35							
SMM 200	5.02SMM2.020010	PN10	200	200	415	24	474	62							
SMM 250	5.02SMM2.020020	PN10	250	250	450	27	570	94							
SMM 300	5.02SMM2.030010	PN10	300	315	530	27	668	145							