

Product Data Sheet

5. Gate valves

5.03 Flanged/Socket gate valves

Flanged/Socket gate valves (SMF)

PN10/16

Material EN 1563 EN-GJS-400-15

Design Std. EN 1074-2

Coating Epoxy GSK RAL-GZ 662


Approval Kiwa BRL-K602/04



kiwa



Kolk gate valves are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 1074-2 (DIN 3352-4) and EN 1171, flange drilling acc. to EN 1092-2 (ISO 7005-2) and socket connection for PE/PVC pipe. Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

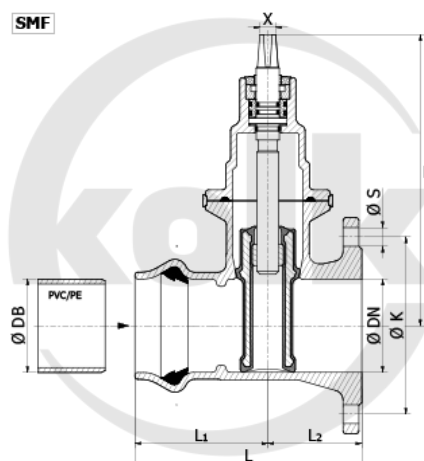

Flanged/Socket gate valves (SMF) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	X [mm]	L1 [mm]	L2 [mm]	H [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]		
SMF 100	5.03SMF1.010010	PN10/16	100	110	255	19	160	95	345	8	180	19	23		
SMF 150	5.03SMF1.010020	PN10/16	150	160	310	19	205	105	430	8	240	23	35		