

Product Data Sheet

5. Gate valves


5.04 Flanged gate valves for gas

Flanged gate valves (SFG5) PN10/16 DIN F5 for gas

Material EN 1563 EN-GJS-400-15
Design Std. EN 1171
Coating Epoxy GSK RAL-GZ 662
Approval N/A


RAL GÜTEZEICHEN
kiwa

Kolk gate valves are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 1171, flange drilling acc. to EN 1092-2 (ISO 7005-2). Face to face acc. to EN 558-1 (DIN 3202-1 F4). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662). From DN 700 upwards standard equipped with gearbox.

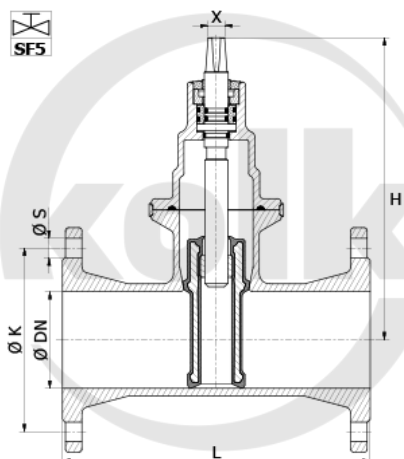

Flanged gate valves (SFG5) PN10/16 DIN F5 for gas

Article	Article Nr.	PN	ø DN [mm]	L [mm]	X [mm]	H [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
SFG5 50	5.04SG51.000010	PN10/16	50	250	14	214	4	125	19	10					
SFG5 65	5.04SG51.000020	PN10/16	65	270	17	258	4	145	19	14					
SFG5 80	5.04SG51.000030	PN10/16	80	280	17	284	8	160	19	16					
SFG5 100	5.04SG51.010010	PN10/16	100	300	19	320	8	180	19	22					
SFG5 125	5.04SG51.010020	PN10/16	125	325	19	387	8	210	19	28					
SFG5 150	5.04SG51.010030	PN10/16	150	350	19	426	8	240	23	35					
SFG5 200	5.04SG52.020010	PN10	200	400	24	531	8	295	23	62					
SFG5 250	5.04SG52.020020	PN10	250	450	27	634	12	350	23	128					
SFG5 300	5.04SG52.030010	PN10	300	500	27	742	12	400	23	135					
SFG5 350	5.04SG52.030020	PN10	350	550	27	827	16	460	23	160					
SFG5 400	5.04SG52.040010	PN10	400	600	32	953	16	515	28	194					
SFG5 450	5.04SG52.040020	PN10	450	650	36	1032	20	565	28	445					
SFG5 500	5.04SG52.050010	PN10	500	700	36	1153	20	620	28	465					
SFG5 600	5.04SG52.060010	PN10	600	800	36	1291	20	725	31	710					
SFG5 200	5.04SG53.020010	PN16	200	400	24	531	12	295	23	62					
SFG5 250	5.04SG53.020020	PN16	250	450	27	634	12	355	28	128					
SFG5 300	5.04SG53.030010	PN16	300	500	27	742	12	410	28	135					
SFG5 350	5.04SG53.030020	PN16	350	550	27	827	16	470	28	160					
SFG5 400	5.04SG53.040010	PN16	400	600	32	953	16	525	31	194					
SFG5 450	5.04SG53.040020	PN16	450	650	36	1032	20	585	31	445					
SFG5 500	5.04SG53.050010	PN16	500	700	36	1153	20	650	34	465					
SFG5 600	5.04SG53.060010	PN16	600	800	36	1291	20	770	37	710					