

Product Data Sheet

6. Non return valves

6.02 Swing check valve

Swing check valve soft seated (TKZ) PN10/16

Material EN 1563 EN-GJS-400-15


Design Std. EN 12334

Coating Epoxy GSK RAL-GZ 662

Approval

RAL GÜTEZEICHEN
BESCHRIEBEN DURCH TECHNISCHE
VORGABEN UND FORMZEICHEN
kiwa

Kolk swing check valves are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Face to face acc. to DIN-EN 558/48-F6, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

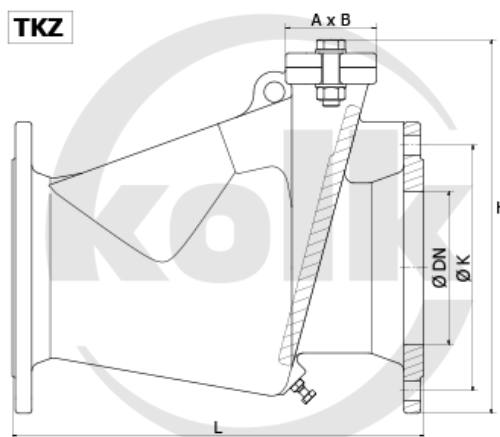

Swing check valve soft seated (TKZ) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	X [mm]	H [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]					
TKZ 40	6.02TKZ1.000010	PN10/16	40	180	108	183	4	110	19	7					
TKZ 50	6.02TKZ1.000020	PN10/16	50	200	116	200	4	125	19	10					
TKZ 65	6.02TKZ1.000030	PN10/16	65	240	129	222	4	145	19	13					
TKZ 80	6.02TKZ1.000040	PN10/16	80	260	140	240	8	160	19	15					
TKZ 100	6.02TKZ1.010010	PN10/16	100	300	164	274	8	180	19	21					
TKZ 125	6.02TKZ1.010020	PN10/16	125	350	204	330	8	210	19	29					
TKZ 150	6.02TKZ1.010030	PN10/16	150	400	222	365	8	240	23	37					
TKZ 200	6.02TKZ2.020010	PN10	200	500	260	430	8	295	23	62					
TKZ 250	6.02TKZ2.020020	PN10	250	600	318	517	12	350	23	94					
TKZ 300	6.02TKZ1.030010	PN10	300	700	352	580	12	400	23	130					