

Product Data Sheet

1. Flanged fittings

1.12 Hatchboxes

Hatchbox (RRK) PN10/16

Material EN 1563 EN-GJS-500-7


Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04


Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

It is possible drill a threadhole on the hatchbox cover and to mount a F piece with DN50 Flange on the hatchbox cover.

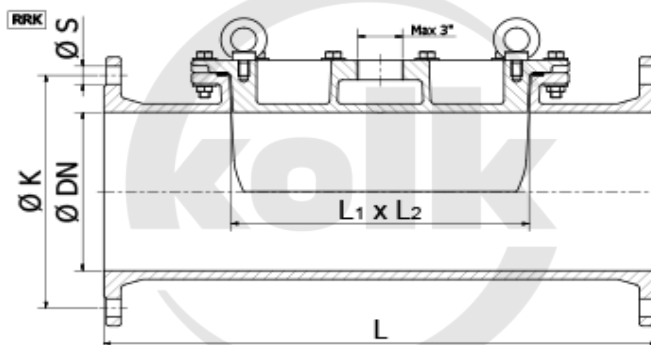

Hatchbox (RRK) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	L [mm]	L1 [mm]	L2 [mm]	Holes # [DN]	Ø K [mm]	Ø S [mm]	G [kg]				
RRK 80	1.13RRK2.000010	PN10	80	500	250	80	8	160	19	26				
RRK 100	1.13RRK2.010010	PN10	100	500	250	100	8	180	19	30				
RRK 125	1.13RRK2.010020	PN10	125	550	300	125	8	210	19	42				
RRK 150	1.13RRK2.010030	PN10	150	550	300	150	8	240	23	48				
RRK 200	1.13RRK2.020010	PN10	200	650	350	200	8	295	23	78				
RRK 250	1.13RRK2.020020	PN10	250	700	360	250	12	350	23	106				
RRK 300	1.13RRK2.030010	PN10	300	750	400	300	12	400	23	140				
RRK 350	1.13RRK2.030020	PN10	350	800	500	350	16	460	23	182				
RRK 400	1.13RRK2.040010	PN10	400	900	500	400	16	515	28	235				
RRK 450	1.13RRK2.040020	PN10	450	900	500	450	20	565	28	195				
RRK 500	1.13RRK2.050010	PN10	500	900	500	500	20	620	28	315				
RRK 600	1.13RRK2.060010	PN10	600	1150	650	600	20	725	31	360				
RRK 700	1.13RRK2.070010	PN10	700	1270	730	700	24	840	31	430				
RRK 800	1.13RRK2.080010	PN10	800	1380	830	800	24	950	34	530				